

Electrical equipment of machines according to IEC 60 204-1

www.issa.int

Dr. Jens Jühling, may 2022

1

Scope

IEC 60204-1 applies to:

the use of electrical and electronic equipment of machines which during the work activity is not used manually, including a group of machines matching together accurately and in a coordinated manner.



Dr. Jens Jühling, may 2022

www.issa.int

2

2



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Annex C

Examples of machines covered by IEC 60204-1

- Metal cutting machines and metal forming machine
- Plastics and rubber machinery
- Wood machinery
- Mobile machinery
- Textile machines
- Refrigeration and air-conditioning machines
- Food machinery
- Printing, paper and board machinery
- Inspecting/testing machinery
- Compressors
- Packaging machinery
- Laundry machines
-

3




issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Scope

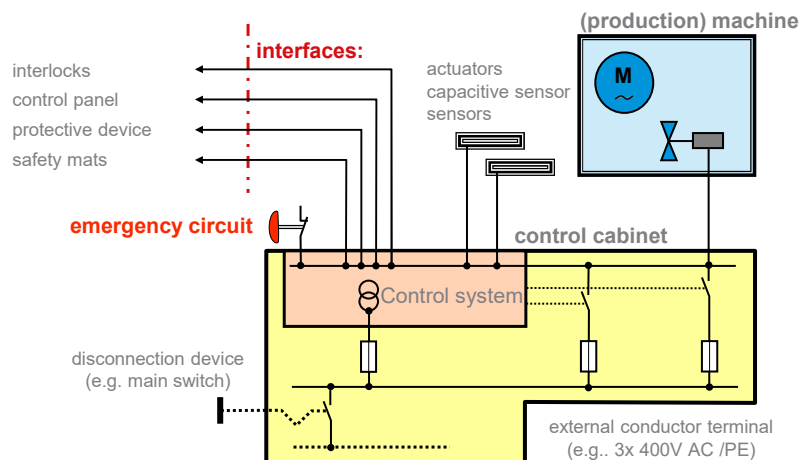


Dr. Jens Jühling, may 2022

www.issa.int

4

4

 **IEC 60204-1: 2016-10**
Electrical equipment of machines


Promoting and Developing
Social Security Worldwide.

Physical environmental and operating conditions
– pollution –

Degree of pollution	Application in case of open insulation (clearances and creepage distances)
1	in air-conditioned, clean, dry rooms
2	in residential and commercial spaces
3	in industrial and business facilities
4	outdoor

Dr. Jens Jühling, may 2022 www.issa.int 5

5

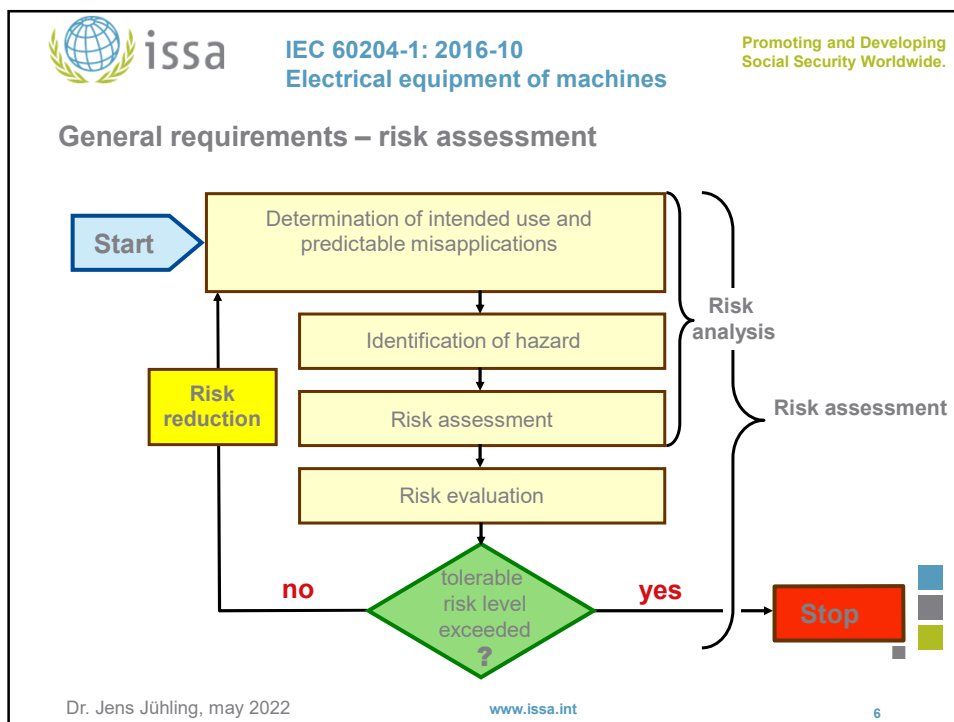

6



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Examples of hazards from the electrical equipment :

hazards	paragraph
Protection against electric shock	6; 8; 11.4
fire hazard	7; 12
Malfunctions (of the energy supply, in control circuits, EMC influence)	5; 9; 10; 11
Failure of safety functions	8.2.3; 9.4.3.3
stored energy	7; 12
hot surfaces	<u>16.2.2</u>

Dr. Jens Jühling, may 2022

www.issa.int

7



issa

IEC 60204-1: 2016-10
Electrical equipment of machines


Promoting and Developing
Social Security Worldwide.

Electromagnetic compatibility (EMC)

According to EN 60204-1

In addition, the equipment must have sufficient immunity to electromagnetic interference to operate properly in its intended environment

The electrical equipment shall not generate electromagnetic disturbances above levels that are appropriate for its intended operating environment.

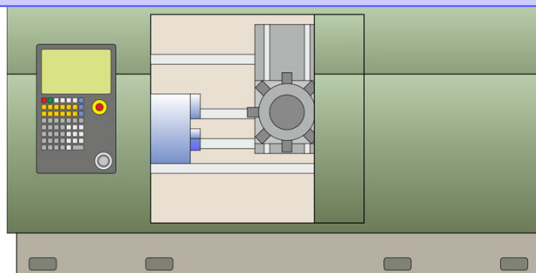

Dr. Jens Jühling, may 2022

www.issa.int

8



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

How can we bring a machine in a safe state?

Dr. Jens Jühling, July 2018

www.issa.int

9

9



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.


Supply Circuit Disconnecting Means – different types –

Switch disconnecter → According to EN 60947-3 (AC-23B or DC-23B)

Disconnecter → With auxiliary contact and leading load disconnection

Circuit-breakers → According to EN 60947-2

Connector system → Load switching capacity is necessary or leading load disconnection




Dr. Jens Jühling, may 2022


www.issa.int

10

10

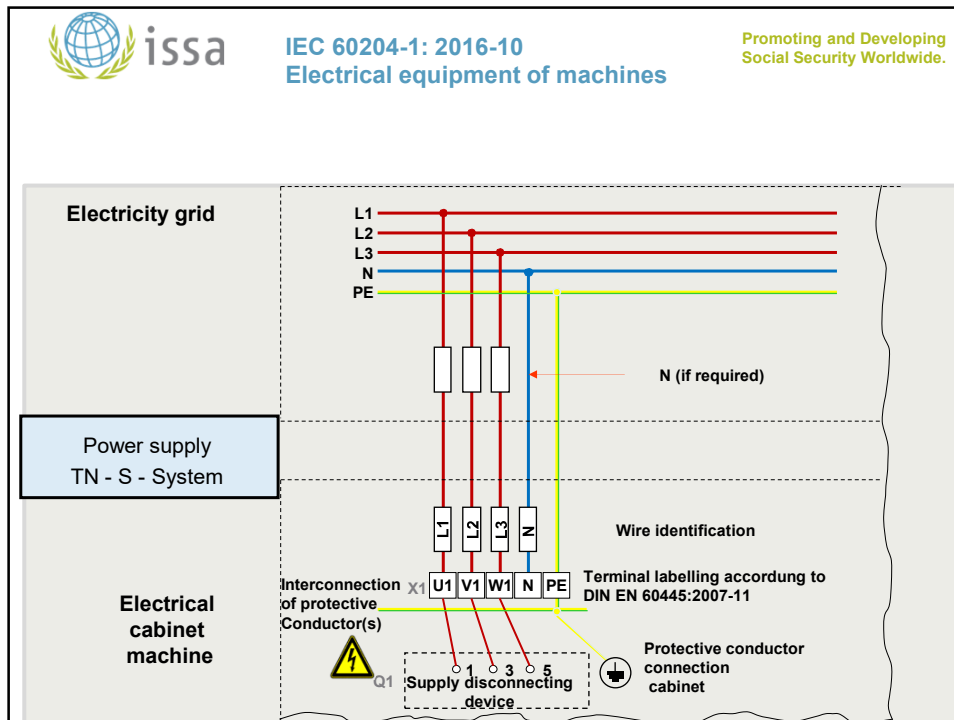


11

 **IEC 60204-1: 2016-10**
Electrical equipment of machines

Promoting and Developing Social Security Worldwide.

Supply Circuit Disconnecting Means – excluded circuits

- Lighting circuits for illumination during maintenance
- Socket circuits for maintenance tools
- Undervoltage protection circuits
- Circuits compulsory for uninterrupted operation, e.g. heating systems, program memory modules
- Control current for locks



⚡


- ➡ Usage of separate isolating devices
- ➡ Warning sign in the immediate area of supply circuit disconnecting means
- ➡ Warning sign in the immediate area of every excluded circuit
- ➡ Warning notice in technical documentation
- ➡ Separate cable routing or colour coding ■

Dr. Jens Jühling, may 2022

www.issa.int

12

12



IEC 60204-1: 2016-10
Electrical equipment of machines


Promoting and Developing
Social Security Worldwide.

Installations to prevent an unexpected start-up

In the course of inspection, maintenance and repair work an appropriate switch-off device shall counteract an unintended start of hazardous movements.

- **Mains isolating device** (e.g. main switch)
- **Power Drive System (PDS) with a Safe Torque Off (STO) function**
- **Removal of fuses**
- **Separating tabs**

} (only in closed electrical service location, because these devices are **not supply disconnecting device** and may only be operated by qualified electrical personnel)


 The selection of a device will be dependent on the risk assessment, taking into account the intended use of the device, and the persons who are intended to operate them.

Dr. Jens Jühling, may 2022

www.issa.int

13

13




IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Main switch – requirements

- ➔ manually operated main switch for each incoming source of supply
- ➔ if several main switches are used → protective interlock
- ➔ must disconnect all live conductors from the supply
- ➔ only one ON and one OFF position (marked with "0" and "I")
- ➔ must be provided with a means permitting it to be locked in the OFF position
- ➔ breaking capacity sufficient to interrupt the current of the largest motor when stalled together with the sum of the nominal running currents of all other loads
- ➔ manual operating means even for power-operated circuit-breakers
- ➔ handle located between 0.6m and 1.9m above the servicing level; preferably below 1.7m




Dr. Jens Jühling, may 2022


www.issa.int

14

14

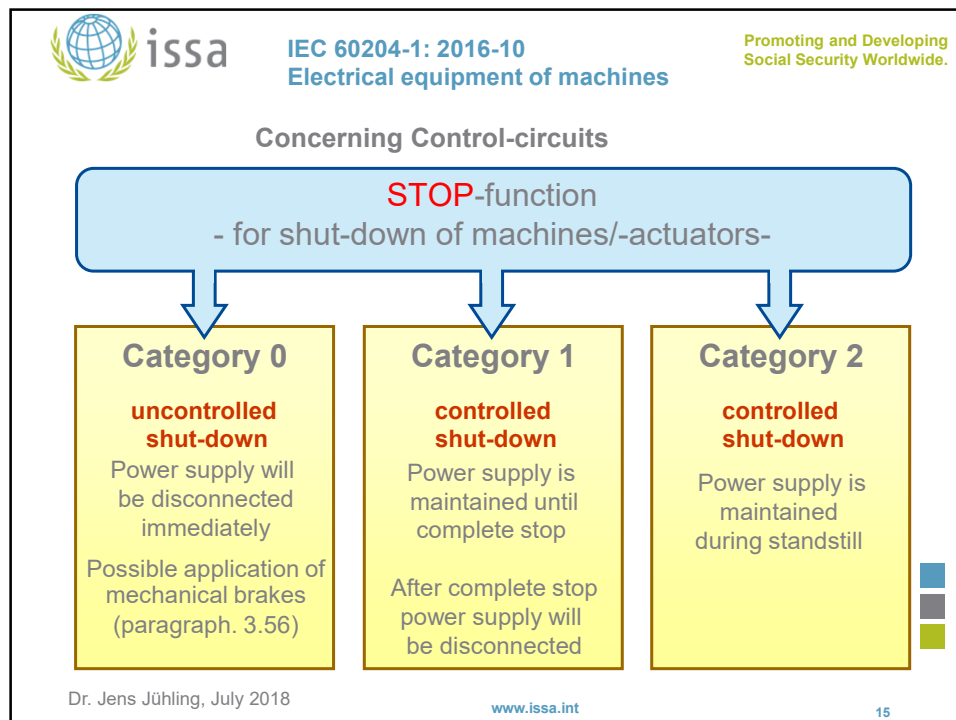

15

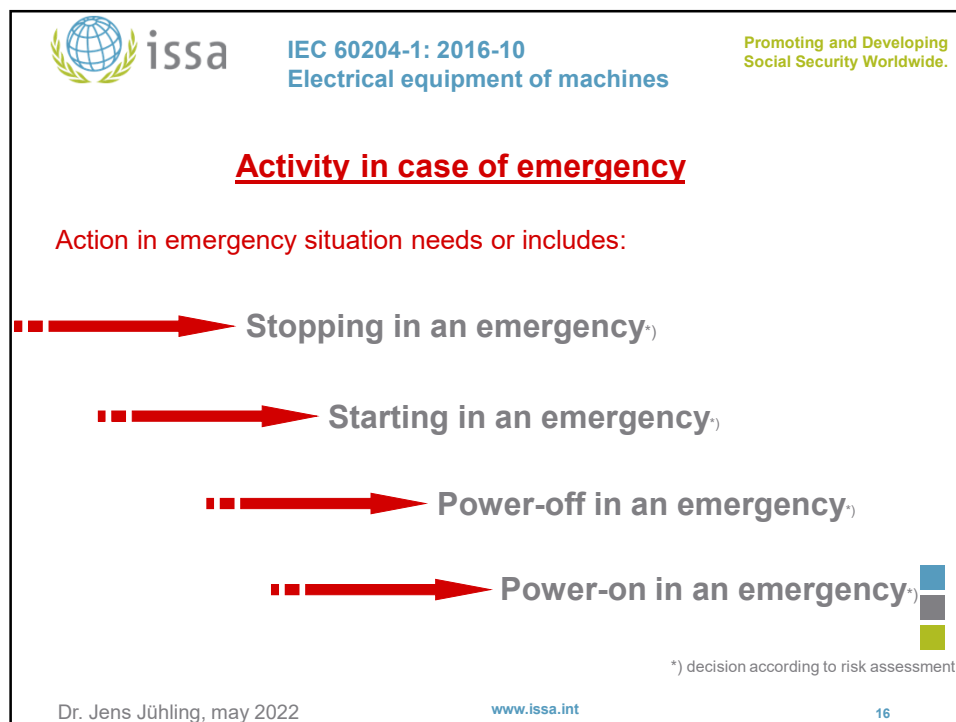

16



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Emergency stop

An emergency operation intended to stop a process or a movement that could become hazardous.

Emergency start

An emergency operation intended to start a process or a movement to remove or avoid a hazardous situation.



Dr. Jens Jühling, may 2022

www.issa.int

17

17



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Emergency switching off

An emergency operation intended to switch off the supply of electrical energy to all or a part of an installation where a risk of electric shock or another risk of electrical origin is involved.

Emergency switching on

An emergency operation intended to switch on the supply of electrical energy to a part of an installation that is intended to be used for emergency situations.




Dr. Jens Jühling, may 2022


www.issa.int

18

18

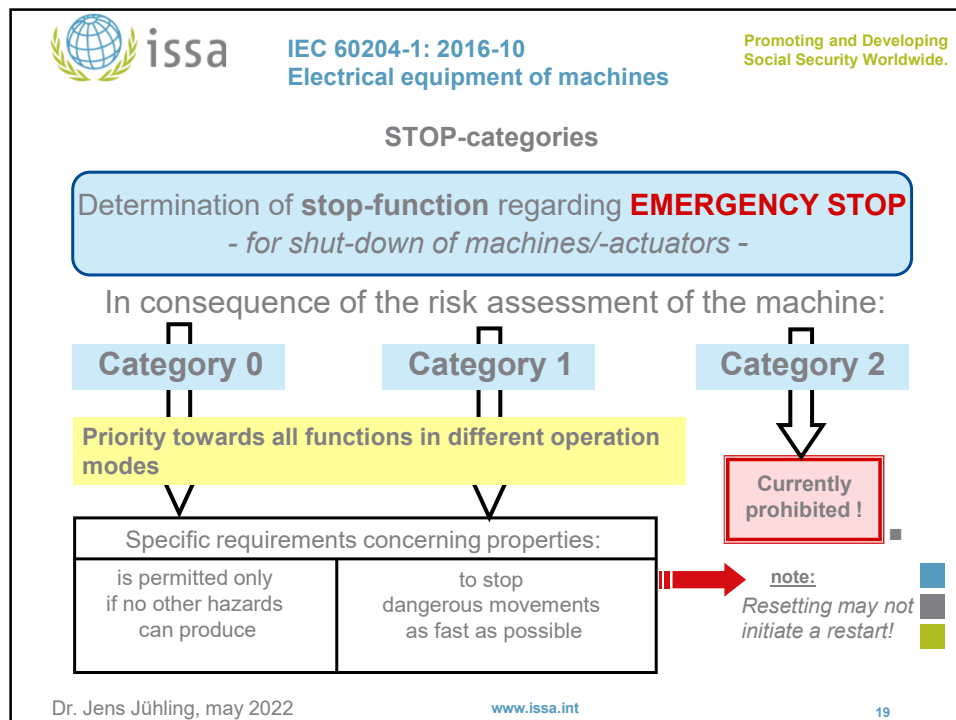

19

 **IEC 60204-1: 2016-10**
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Emergency Stop

The emergency stop shall function either as a stop category 0 or as a stop category 1. The choice of the stop category of the emergency stop depends on the results of a risk assessment of the machine

New: Exception: In some cases, to avoid creating additional risks, it can be necessary to perform a controlled stop and maintain the power to machine actuators even after stopping is achieved. The stopped condition shall be monitored and upon detection of failure of the stopped condition, power shall be removed without creating a hazardous situation.

Dr. Jens Jühling, may 2022 www.issa.int

20



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

EN ISO 13850:2015 "EMERGENCY STOP"

Paragraph 4. 1. 3.

EMERGENCY-STOP function has to be implemented in such a way that the decision to activate the **EMERGENCY-STOP button** does not need further reflections, especially with regard to resulting consequences.

(concerning the area that shall be switched off, deceleration rate etc.)



Dr. Jens Jühling, may 2022

www.issa.int

21

21



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

What kind of requirements must be met by the control systems of machines?




Dr. Jens Jühling, may 2022

www.issa.int

22

22



IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Requirements of control systems

Machinery directive -annex I / number 1.2.1:
Safety and reliability of control systems

"Control systems must be designed and constructed in such a way as to prevent hazardous situations"

They have to be designed and constructed in such a way that

- they can withstand the intended normal operating conditions and external impacts
- a fault in the hardware or the software of the control system does not lead to hazardous situations
- errors in the control system logic do not lead to hazardous situations
- reasonably foreseeable human error during operation does not lead to hazardous situation

implementation:


- specifications in the C standards (having priority)
- DIN EN ISO 13849-1 / -2
- DIN EN 62061
- DIN EN 61508
- individual responsibility

Dr. Jens Jühling, may 2022

www.issa.int

23

23



IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

2006/42/EG – requirements for control systems

1.2.4.3. Stop in an emergency :


- The EMERGENCY STOP function must be available and operational **at all times**, regardless of the operating mode.
- EMERGENCY STOP command devices has to **complement** other protective measures, **but must not replace them**.

Consequence

Emergency stop is not a **substitute** for safety functions

Emergency is **dependent** of will

Safety functions are **independent** of will



Dr. Jens Jühling, may 2022

www.issa.int

24



issa

IEC 60204-1: 2016-10 Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Cableless control system (CCS)

Operating restrictions of control

- only for the associated machine
- only for predetermined functions
- spatially delimited if necessary



Unequivocally stop-function on the operator panel

- operating unit shall not be marked as EMERGENCY SHUT-OFF

Automatic stop of machine when:

- a stop signal is received
- a system fault is detected
- no valid signal has been detected within a predetermined period



Use of error detection procedures during data transmission

When using several operator panels only one shall be released
(exception: stop-function) ■

Dr. Jens Jühling, may 2022

www.issa.int

25

25



issa

IEC 60204-1: 2016-10 Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

New: Monitoring the effectiveness of a wireless control system for controlling a machine (IEC 204-1, clause 9.2.4.2)

The effectiveness of a wireless control system (CCS) for controlling a machine must be automatically monitored, either permanently or at appropriate intervals. The effectiveness must be clearly indicated (e.g. by a signal lamp, indication on a display, etc.).


9.2.4.3: Control limitation (new)

Measures (e.g. coded transmission) must be provided to ensure that the machine does not respond to signals other than from the intended wireless control.


Dr. Jens Jühling, may 2022

www.issa.int

26

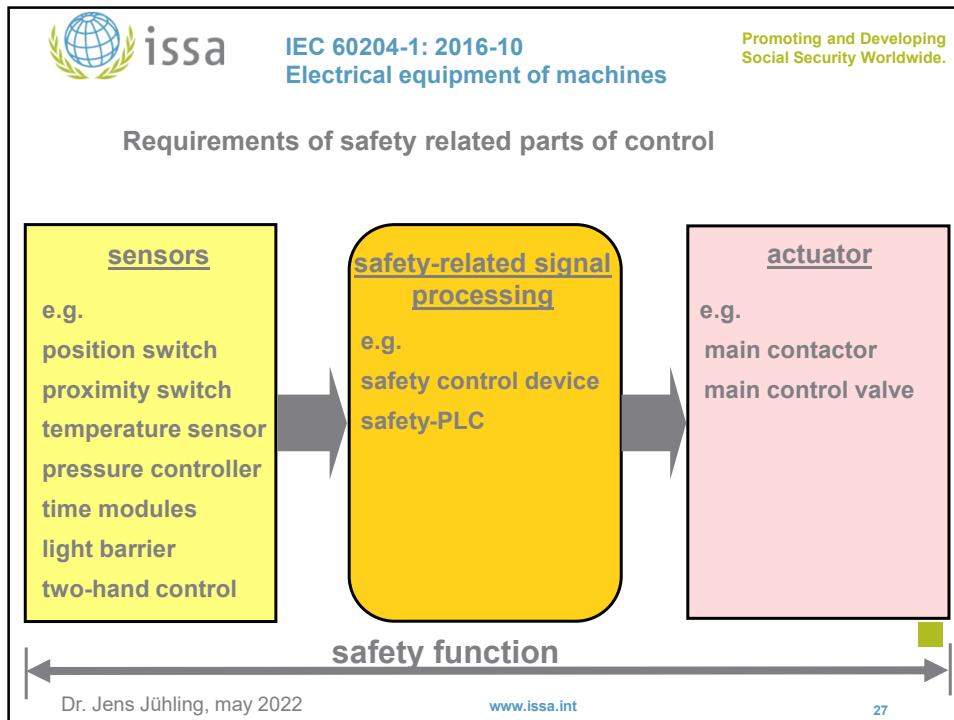

27

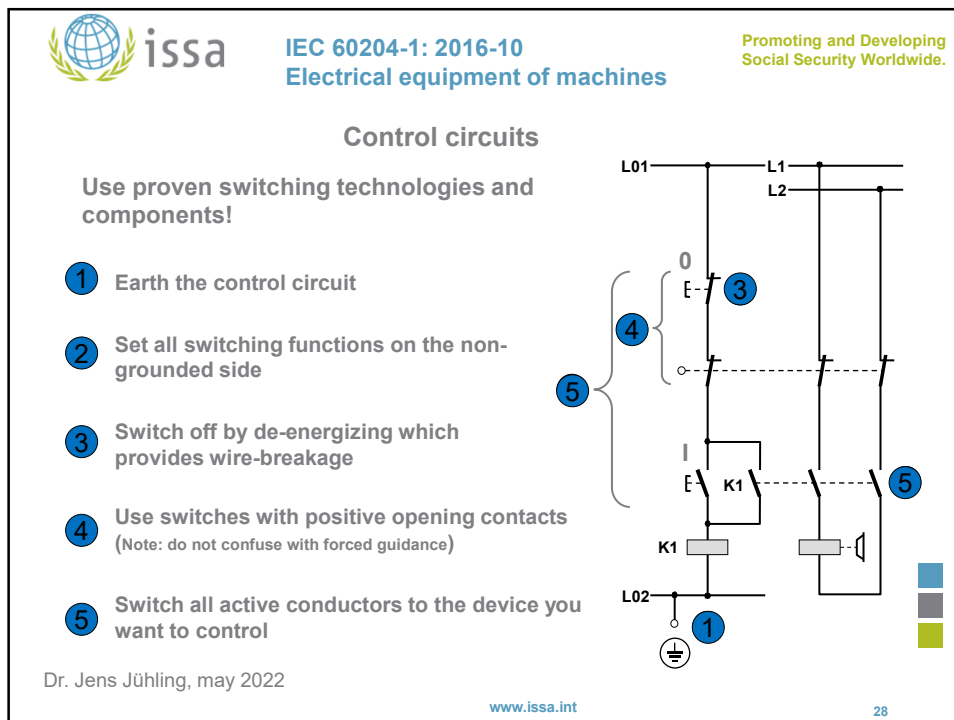

28



IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Requirements concerning control systems

Reliable component?




- has been used widely and successfully in similar applications in the past

or

- has been produced and verified according to manufacturing principles which reveal adequacy and reliability regarding safety-related application

Examples: approved screws and springs, positively opening position switches according to DIN EN 60947-5-1, emergency stop facilities according to both DIN EN 418 and DIN EN 60947-5-5, relays and contactors under specific conditions.


The classification as reliable component always depends on its application!

Dr. Jens Jühling, may 2022

www.issa.int

29

29



IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Requirements regarding control systems

Reliable safety principles?

- Error prevention
- Oversizing
- Use of components with defined failure behaviour
- Inevitable mechanical impact/operation
- Force-actuated contacts
- Utilization of redundancy
- Utilization of diversity
- Error detection

Dr. Jens Jühling, may 2022

www.issa.int

30

30



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Operator interface – location and mounting

Actuating means shall be located and assembled in such a way that...

- they are readily accessible for service and maintenance
(at least 0.6m above the servicing level),
- the operator is not placed in a hazardous situation when operating them,
- the possibility of damage is minimal,
- the possibility of inadvertent operation is minimized,
- the operator is able to identify the target operating mode immediately or on the basis
of a response,
- their movements are in line with the target operating mode,
- they withstand mechanical, chemical and thermal effects.

Dr. Jens Jühling, may 2022



31

www.issa.int

31



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Protection against inadvertent operation



Hardware
solution ?



Incorrect!!!

Dr. Jens Jühling, may 2022

www.issa.int

32

32



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.


Fatal accident at a guillotine cutter

Dr. Jens Jühling, may 2022

www.issa.int

33

33



issa

Promoting and Developing
Social Security Worldwide.

General information

- According to the company, the insured person had been working as a machine operator on cutting lines for about 20 years.
- The scene of the accident was the unloading station of the cutting line.
- Course of events: Presumably, the insured went under the base plate to rectify the fault at the unloading device. The base plate (750kg) fell down and the insured got trapped. He was fatally injured.

Dr. Jens Jühling, July 2022

www.issa.int

34

34

Scene of the accident – unloading station



Dr. Jens Jühling, may 2022

www.issa.int

35

35

Course of events

- A mechanical defect that had already occurred once in the previous week and that had not been repaired permanently and safely led to another blockage of the base plate.
- The employee entered the area below the base plate without securing it. By triggering the light barriers in front of the stroke area the drive was switched off.
- The monitoring of the movement of the base plate did not work properly on the day of the accident. Normally, the base plate is immediately lifted again when it hits the ground/makes contact with an object. By this, the carrying chains will be tightened again, thus restoring them to a safe condition. The cable control sensor used for this purpose, which triggers an emergency stop, showed a defect. This allowed the carrying chains to move further downwards than specified.
- The base plate got stuck to the back plate of the machine. Without securing the base plate, the employee crawled under the base plate to release it. The plate gave way and was able to continue moving due to the untensioned carrying chain.

Dr. Jens Jühling, may 2022

www.issa.int

36

36

Accident cause – bent plate at the back wall



Dr. Jens Jühling, may 2022

www.issa.int

37

37

Monitoring of the base plate's movement – cable control switch/carrying chains



lose Tragekette nach Stopp auf Paletten-
stapel und Reversierbewegung

Dr. Jens Jühling, may 2022

www.issa.int

38

38



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Fatal accident at a plastic injection machine

Dr. Jens Jühling, may 2022

www.issa.int



39



issa

Promoting and Developing
Social Security Worldwide.

General information

- According to the company, the insured person S had been working as a machine operator on cutting lines for about 20 years.
- According to the company, the insured person B had been working as a holiday help on the plastic injection machine
- The scene of the accident was the mobile lifting platform on the plastic injection machine
- Course of events: The cause of the accident was an improperly laid connection cable (loosely under the platform) of a multi-socket strip.


Dr. Jens Jühling, July 2022

www.issa.int

40



40

 **IEC 60204-1: 2016-10**
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

plastic injection machine


Electrically adjustable platform

The fatally injured S. laid with his head above this machine panel.

The injured vacation worker B laid with his head on this metal slide.

Dr. Jens Jühling, may 2022

www.issa.int

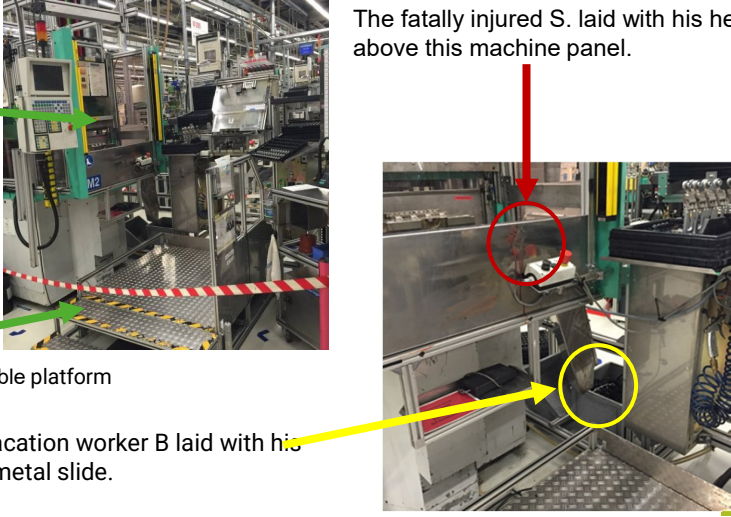

41

 **IEC 60204-1: 2016-10**
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Dr. Jens Jühling, may 2022

www.issa.int



42



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

Cause of Accident

The cause of the accident was an improperly laid connection cable (loosely under the platform) of a multi-socket strip. This cable was plugged into a socket mounted on the plastic injection molding machine. This, in turn, **was not secured with a 30 mA residual current circuit breaker**, but was connected directly to the machine's control cabinet and secured with an automatic 16 A circuit breaker.

Furthermore, the motorized mobile lifting platform was not integrated into the protective conductor system with low resistance

Dr. Jens Jühling, may 2022

www.issa.int



43



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

15.1 Socket-outlets

all unearthed conductors connected to the socket-outlet shall be protected against overcurrent and, when required, against overload in accordance with 7.2 and 7.3 separately from the protection of other circuits



new requirement!!

circuits supplying socket-outlets with a current rating not exceeding **20 A** shall be provided **with residual current protection (RCDs)** with a rated operating current not exceeding **30 mA**



Dr. Jens Jühling, may 2022

www.issa.int



44



issa

IEC 60204-1: 2016-10
Electrical equipment of machines

Promoting and Developing
Social Security Worldwide.

**Many thanks for
your attention!**



Dr. Jens Jühling, may 2022

www.issa.int

45